


Monitor Mount Assembly




Guidelines

- Monitor Mounts must be installed prior to the installation of all fabric graphic panels.
- All monitor mounts must be placed in the upper row of the frame to ensure stability.
 - Back Straps will be used to stabilize the frame for all single-sided displays.
 - Four stabilizing feet will be needed for frames containing a monitor mount.

(2) feet will be positioned directly beneath the monitor and (1) foot will be positioned at each end of the frame

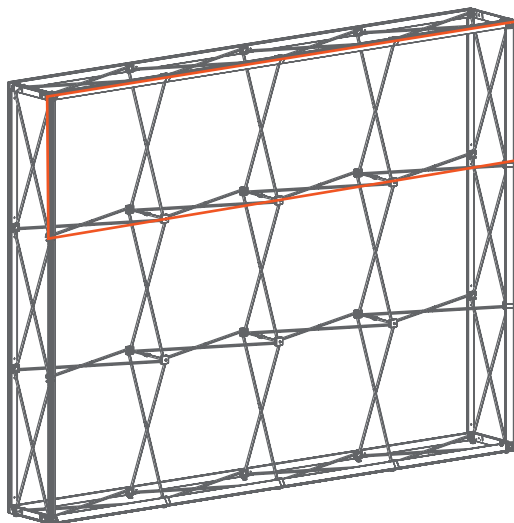


Installation
Area

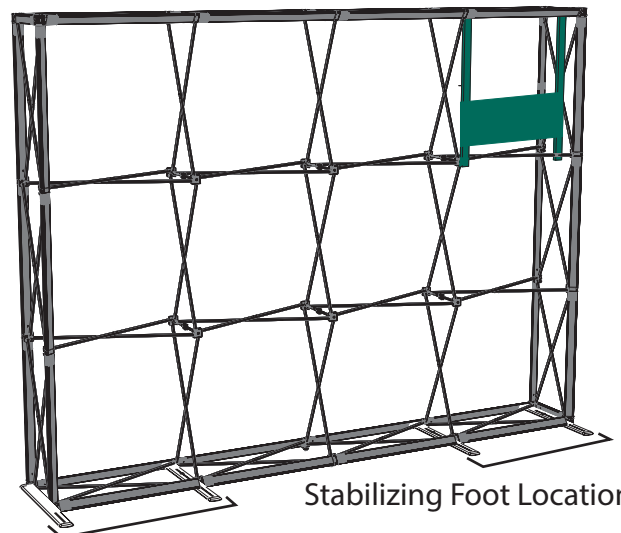


Stabilizing Foot Locations


Stabilizing Foot Assembly

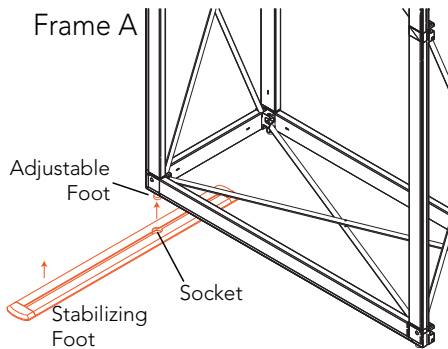

1. Slide the socket of the stabilizing foot over the front adjustable foot of the frame.

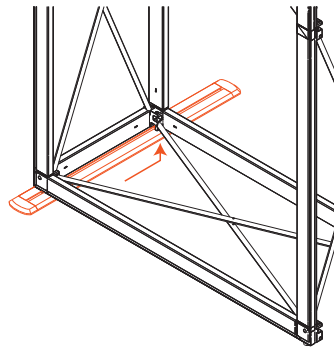

2. Slide the stabilizing foot back and slide the same socket over the back adjustable foot.

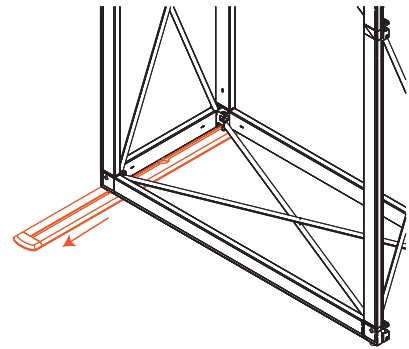


3. Slide the stabilizing foot forward.

Back Strap Assembly

- Use back strap to secure the frame structure and prevent buckling and frame instability.
- The back straps should be secured over the hub bolts per the silver grommets shown below.
- The back straps will be secured over top and bottom hubs and the appropriate number of straps will be provided per applicable frame.




Bottom Hub

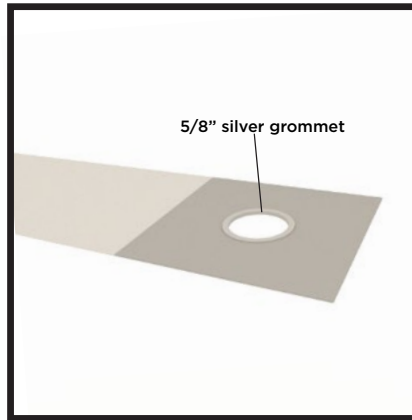


Top Hub


Monitor Bracket Assembly

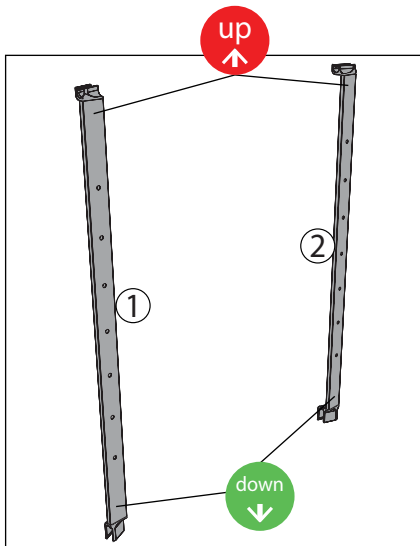

STEP 1

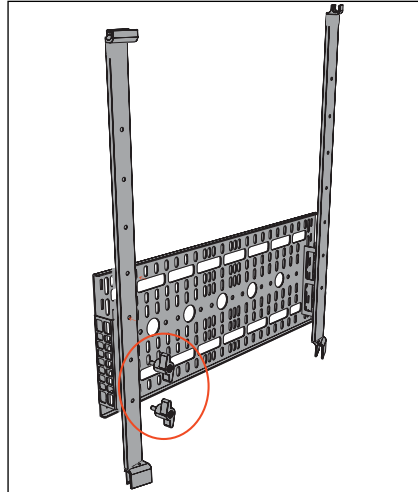


STEP 2

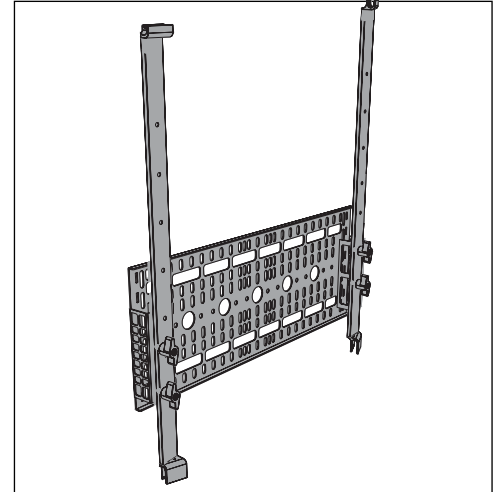


STEP 3

4. Attach the monitor plate to the two vertical pieces with four wing screws.
The wing screws will go through the bottom two mounting holes in the vertical pieces.
Note the up and down arrows on the vertical pieces.

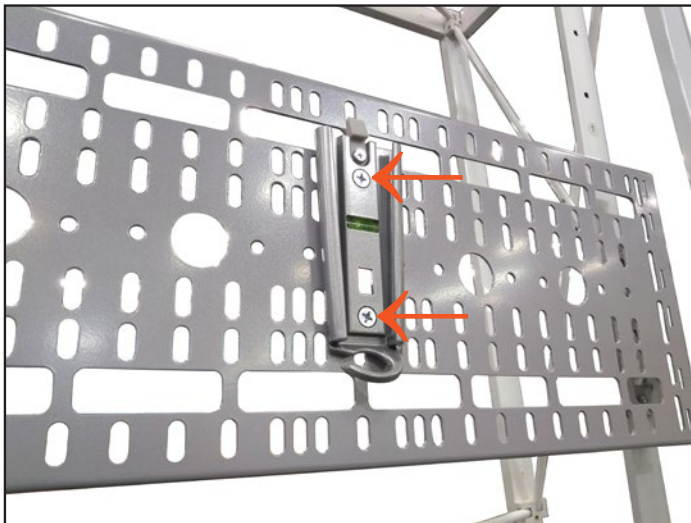


5. Attach the smaller monitor bracket back plate onto the monitor plate as seen above using the provided 1" screws and wing-nuts.

Note: The back plate can be mounted anywhere along the plate to align with the cutout in the graphic.

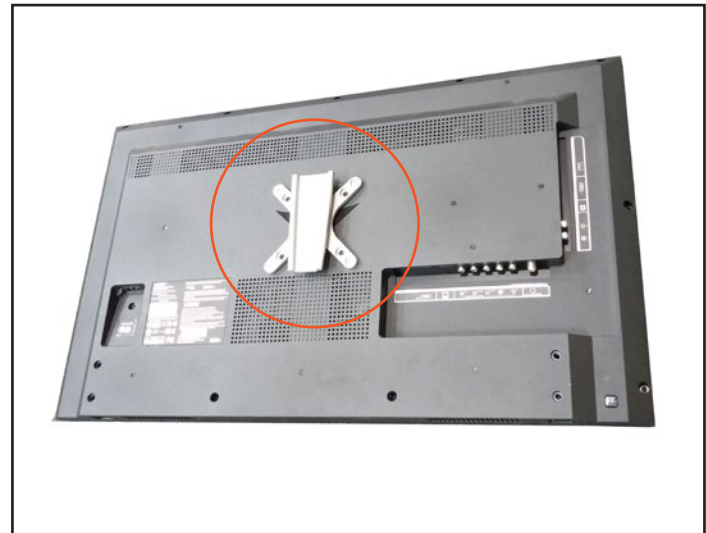


6. Attach the X-shaped monitor mount to the television using the appropriate screws for the television.

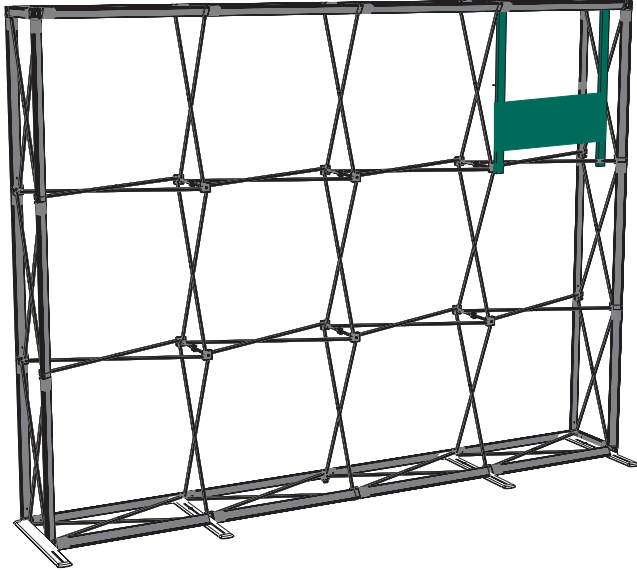

7. To hang the monitor mount onto the frame, hold it in place and slide the upper u-channels over the top cross member of the frame.



8. The lower u-channels will rest on the cross members below.

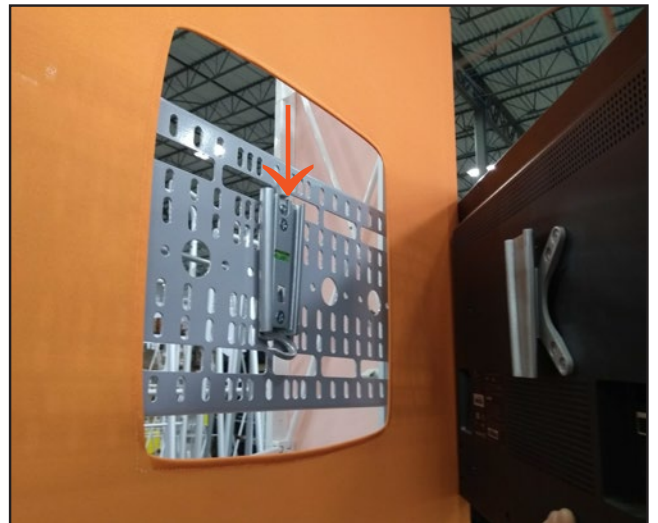

9. Install the graphic - See graphic installation instructions on the next page.

10. Hang the monitor onto the monitor bracket as seen above.

Graphic Installation Instructions



Caution! Installing silicone-edged graphics is technique sensitive; Practice will shorten installation time.



Handle graphics with care with clean hands in a clean environment. Clean cloth or latex gloves are recommended.

Graphic installation may be easier with the frame laying on the ground.




How to Install SEG Graphics:

Turn and tuck the side of the graphic with the silicone welt into the SEG groove. The stitched edge goes into the groove first.



Pulling on the silicone welt during installation stretches the silicone and creates a bulge in the silicone welt that is difficult to correct smoothly.

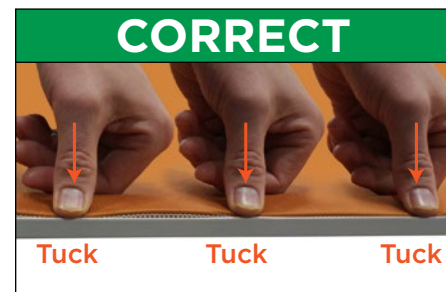

A series of tucks reduces excess silicone.

Installing Graphics with Endcaps

1. Start tucking the graphic in one corner. Start after the gap in the silicone.

2. Tuck the graphic in the middle and then the opposite top corner.

3. Tuck the bottom corners and the middle of the bottom front.

4. Complete front installation.

5. Wrap endcaps around the frame and tuck into the side channels of the rear channel bars and the horizontal channels of the endcap channel bars.