



1. Set the frame standing on end. Grasp two of the middle hubs (circled in orange) and gently expand the frame. Note the location of the adjustable feet for future reference.

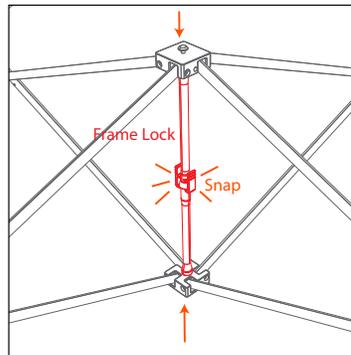


2. Snap all frame locks (marked in red in the diagrams below) to secure the frame.


It is recommended to assemble the frame with it laying on its back.

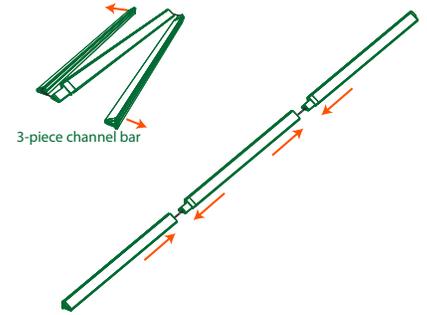


3. Unfold and slip together each bungeed channel bar.

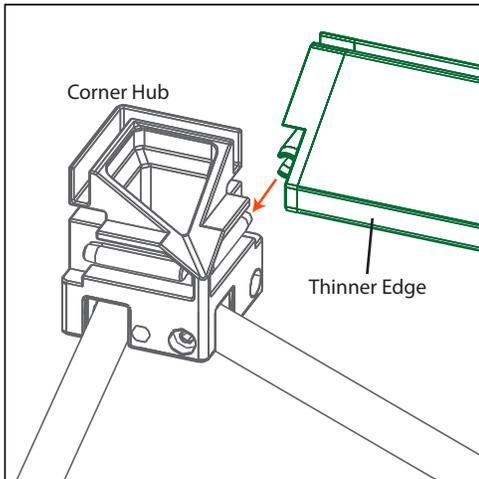


4A. Slide one end of the first channel bar onto the connection point of one of the corner hubs. The triangular channel bar's thinner edge goes toward the inside of the frame.

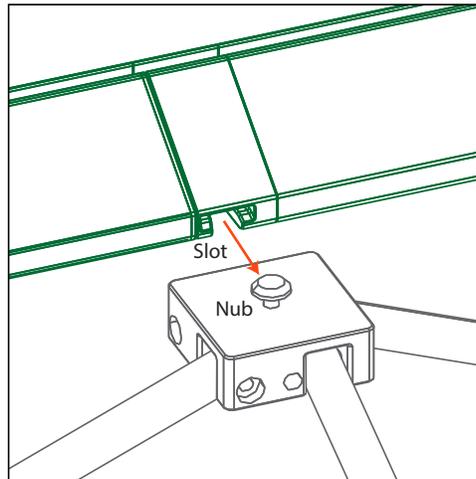



4B. Snap the slots in the back of the channel bar onto the nubs on the hubs.

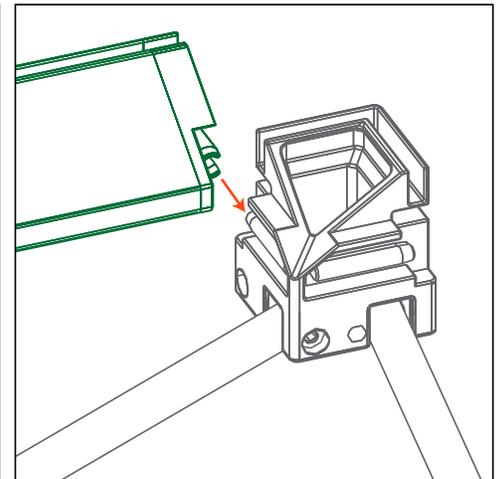


4C. Attach the other end of the channel bar to the other corner hub. Repeat steps 4A-4C for all channel bars as seen in the diagram below.

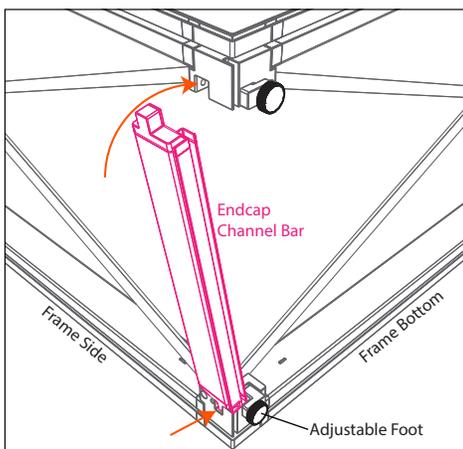


5. Snap four endcap channel bars onto the sides of the frame.

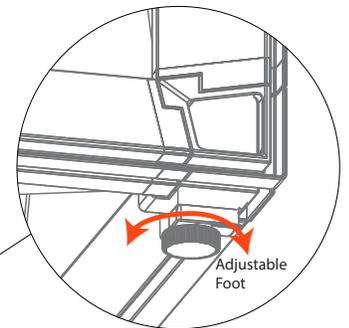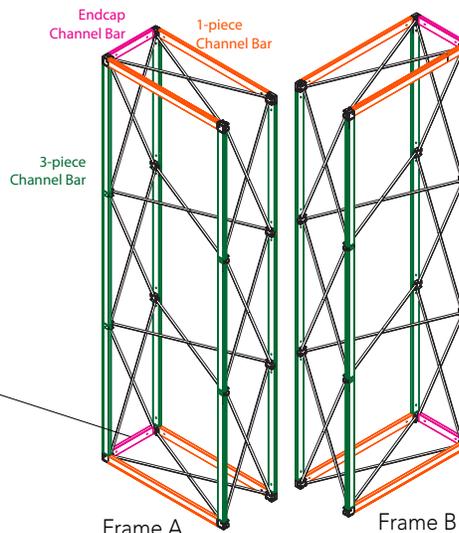


6. If the frame is on an uneven floor or if it leans, adjust the bottom feet.

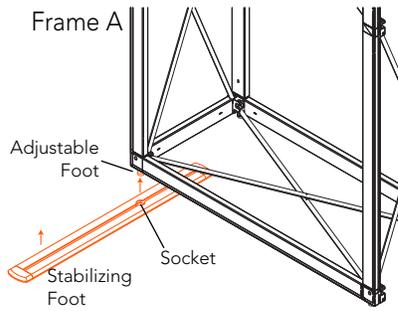


7A. Slide the socket of the stabilizing foot over the front adjustable foot of the frame A.

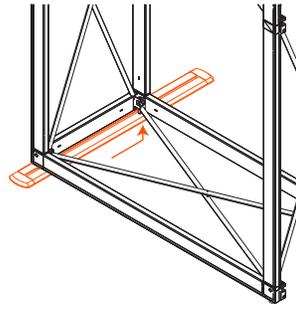



7B. Slide the stabilizing foot back and slide the same socket over the back adjustable foot.

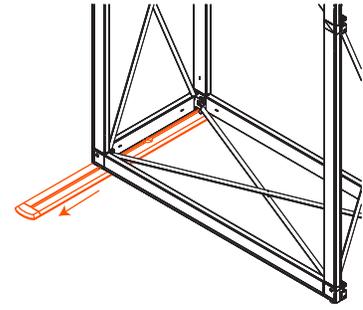

7C. Slide the stabilizing foot forward.

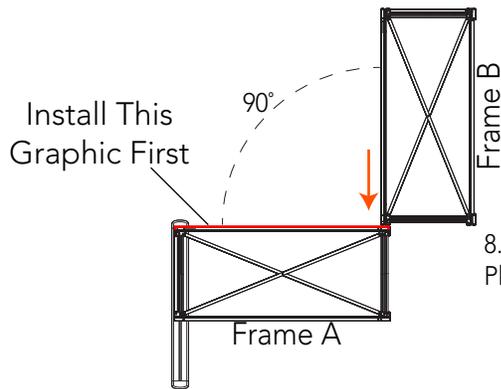


8. Install Frame A's back graphic (marked in red to the left), first. Place the frames in a 90 degree with the frame B overlapping frame A.

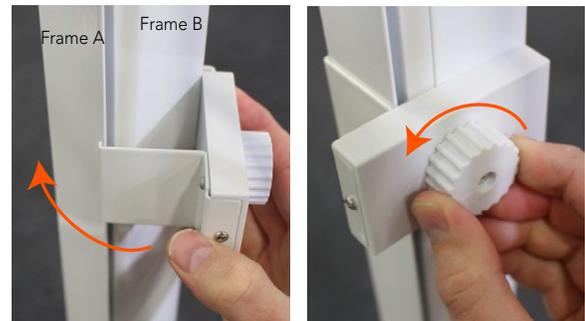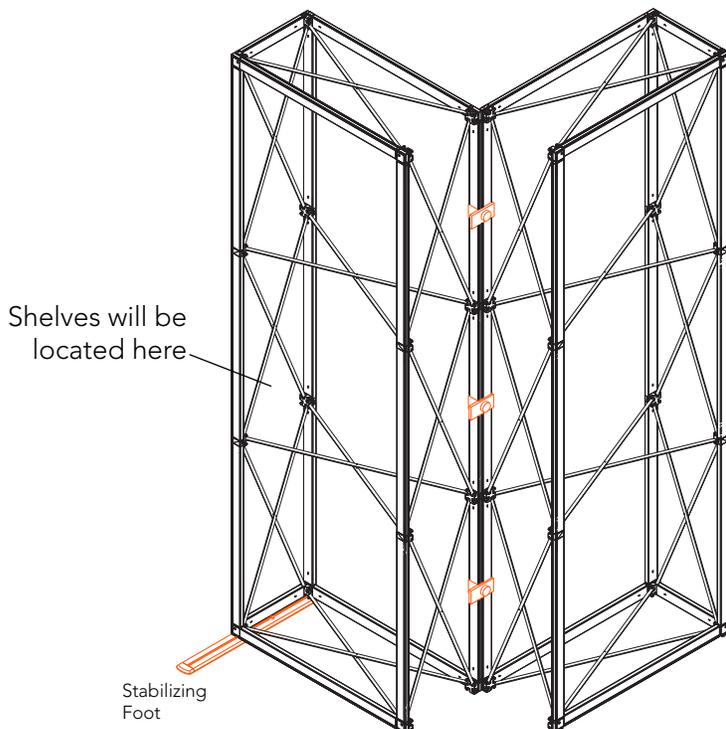

9. Attach the two frames together with 3 corner clamps. The clamps lock by turning the knob **counterclockwise**.



10. Assemble the shelf bracket with four knobs.

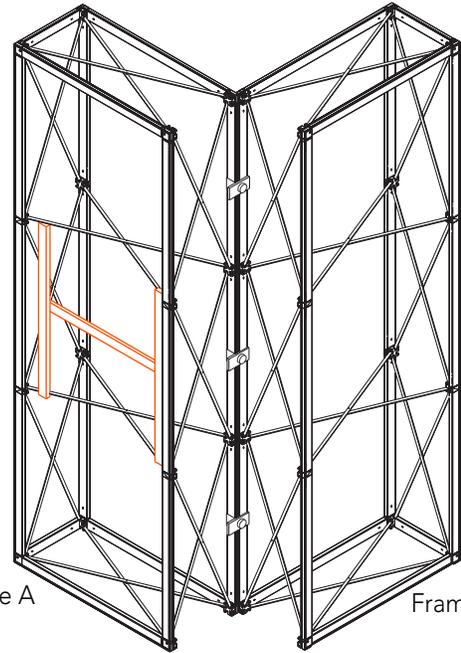


Frame A

Frame B


11. Install the shelf bracket in the center of frame A.

Hook the top hooks onto the frame, and then let the bottom hooks rest on the lower "X" of the frame.

The knobs will face the back of the frame.

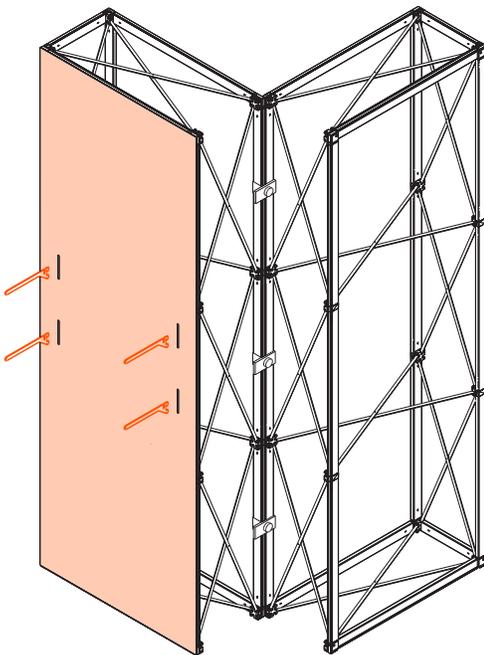

12. Install the graphic with the shelf support bracket slots on the front of frame A. Install the shelf support brackets.

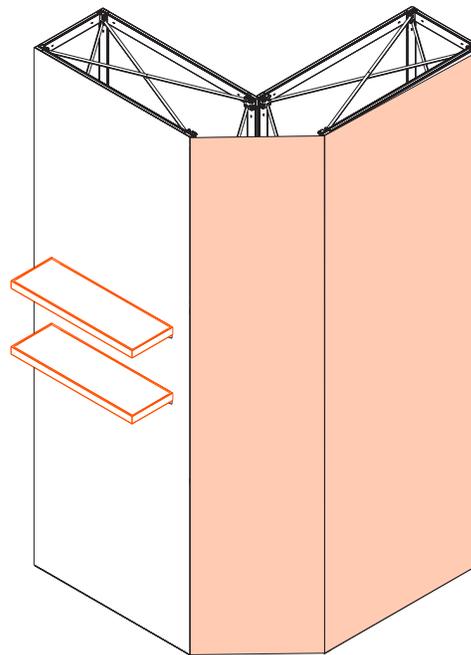

13. Install the remainder of the graphics and set the shelves on the supports. See the following page for graphics installation techniques.



14. Attach optional light clips to top channel bars and attach the lights.

## Graphic Installation Instructions



Caution! Installing silicone-edged graphics is technique sensitive; Practice will shorten installation time.



Handle graphics with care with clean hands in a clean environment. Clean cloth or latex gloves are recommended.



How to Install SEG Graphics:

Turn and tuck the side of the graphic with the silicone welt into the SEG groove. The stitched edge goes into the groove first.



Pulling on the silicone welt during installation stretches the silicone and creates a bulge in the silicone welt that is difficult to correct smoothly.

A series of tucks reduces excess silicone.



If graphics need to align across multiple frames, tuck both corresponding graphics into the channels at the same time to help align.



Corner graphics install into the side channels of the two frames.